




VEGA G2



150LM/W

Features


- Housing: Die-cast Aluminum ADC12
- Thermal Conductivity: 96 W/m·K
- Led: Cree led
- CRI: Ra>70 (80&90 for option)
- SDCM: <6
- Power Factor: >0.95
- THD: <15
- Driver: Meanwell HBG
- Driver Efficiency: >93%
- Protection: OTP, OCP, OVP, SCP
- Surge Protection: 6KV
- Waterproof: IP65
- Impact Test: IK08
- Electrical: 100-277V, 50/60Hz
- Operating Temperature: -40~60°C
- TM21: L90B10>50,000H
- Lifetime: 50,000H

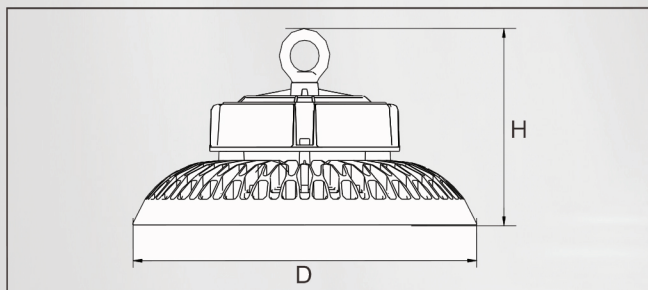

Functions

ZigBee • PWM • DALI • 0/1~10V • Micro-wave

Optical options:



Model	Watt	Voltage	Lumen	CRI	IP	Dimension
HB100SE0H-CM	100W	100~277	15000LM	>70 (80)	IP65	D250*H178MM
HB120SE2H-CM	120W	100~277	18000LM	>70 (80)	IP65	D300*H181MM
HB150SE2H-CM	150W	100~277	22500LM	>70 (80)	IP65	D300*H181MM
HB200SE4H-CM	200W	100~277	30000LM	>70 (80)	IP65	D345*H183MM
HB240SE4H-CM	240W	100~277	36000LM	>70 (80)	IP65	D345*H183MM

