




MIZAR G2



Features


Housing: Die-cast Aluminum ADC12
 Thermal Conductivity: 96 W/m·K
 Led: Cree
 CRI: Ra>70 (80/90 for option)
 SDCM: <6
 Power Factor: >0.95
 THD: <15
 Driver: Osram
 Driver Efficiency: >90%
 Protection: OTP, OCP, OVP, SCP
 Surge Protection: 6KV
 Waterproof: IP65
 Impact Test: IK08
 Electrical: 220-240V, 50/60Hz
 Operating Temperature: -40~50°C
 Tm21: L80B10>50,000H
 Lifetime: 50,000H

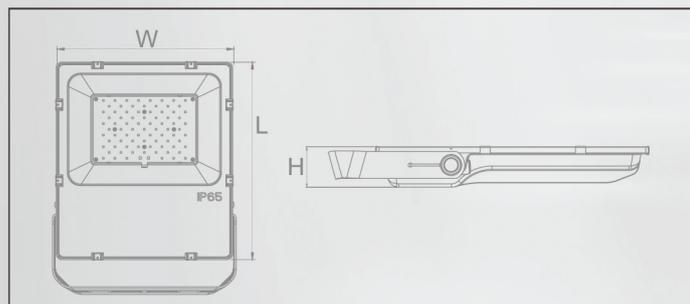

Functions

ZigBee · PWM · DALI · 0/1~10V · Micro-wave · PIR

Optical options:



Model	Watt	Voltage	Lumen	CRI	IP	Dimension
FL070SEGH-CO	70W	220~240V	10500LM	>70 (80)	IP65	L354.5*W245*H55MM
FL100SEGH-CO	100W	220~240V	15000LM	>70 (80)	IP65	L402.5*W295*H60MM
FL150SEGH-CO	150W	220~240V	22500LM	>70 (80)	IP65	L430.5*W330*H60MM
FL200SEGH-CO	200W	220~240V	30000LM	>70 (80)	IP65	L470.5*W360*H60MM